


Low VF Bridge Rectifiers



RBU1506L-S foot spacing is 3.5±0.5mm

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

Features

- Glass Passivated Chip Junction
- Low IRRM
- Low VF
- High VRRM

Benefits

- Case: RBU
- Terminals: Solderable Per MIL-STD-750
- Reduced power loss and switching transistor
- Reduced snubbing

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.


Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	RBU1506L-S	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	600	V
Maximum RMS voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	V
Average Rectified Output Current	Io	15.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	300	A
Maximum Forward Voltage at 7.5 A	VF	0.95	V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=125 °C	IR	10 500	μA
Typical Junction Capacitance (Note1)	Cj	25	pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150	°C


Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad


RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

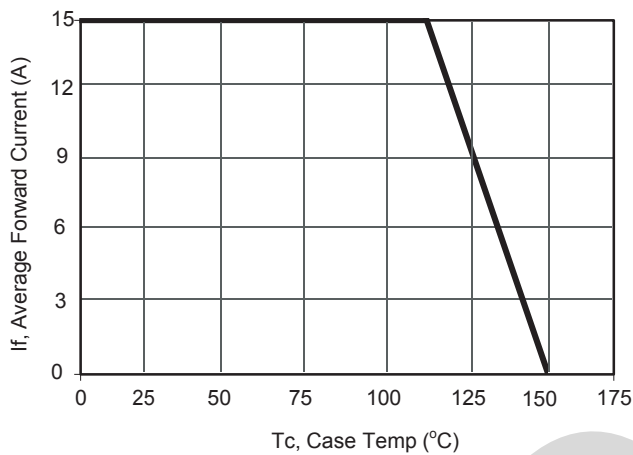


Current Derating, Case

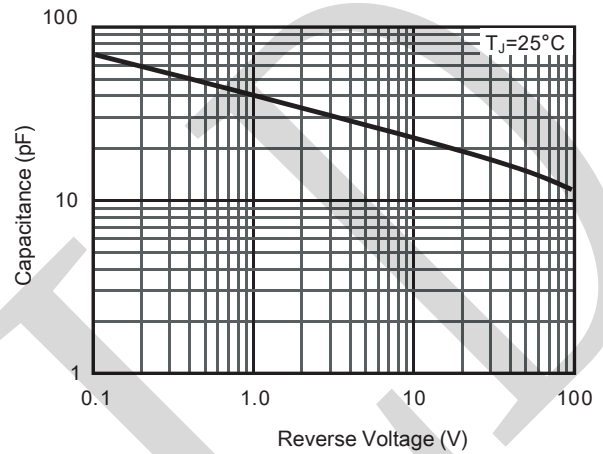

Typical Junction Capacitance

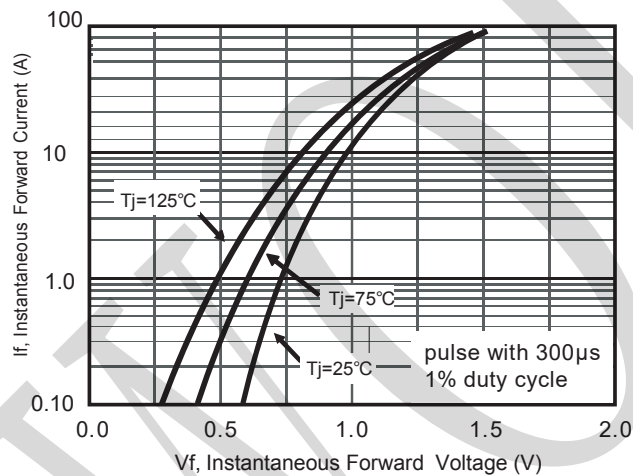


Typical Forward Voltage

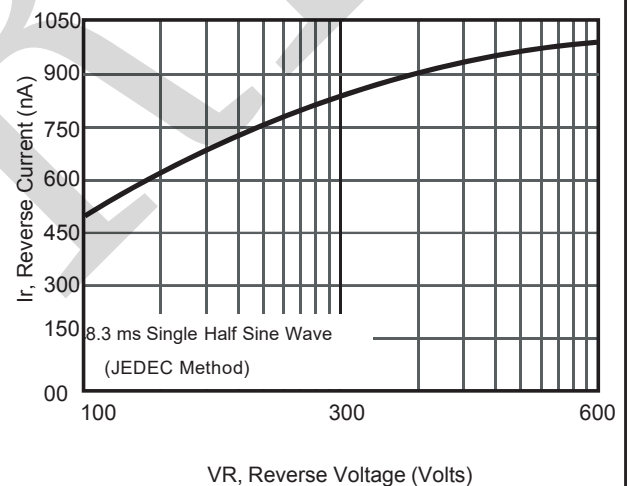

Typical Reverse Current

PACKAGE OUTLINE DIMENSIONS

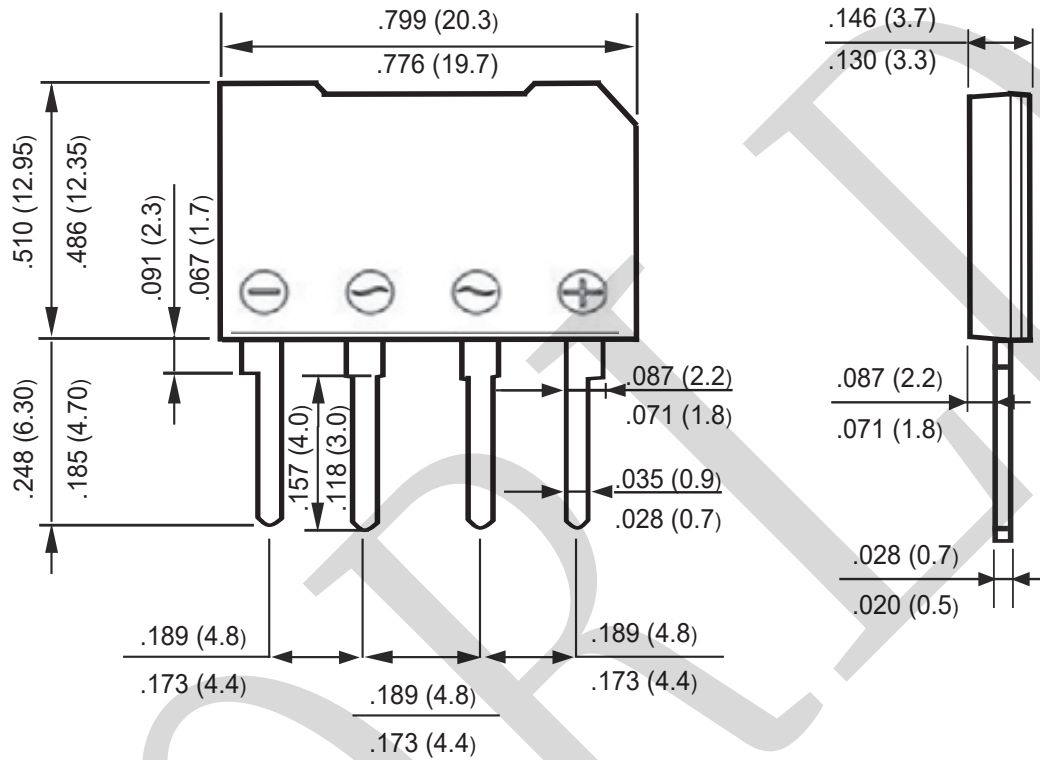

NOTE: 1.RBU1506L-S as the customer required,foot spacing is 3.5 ± 0.5 mm.

Marking Information

