



Trench Barrier Schottky Rectifier

TSP5S150SP

TO-277

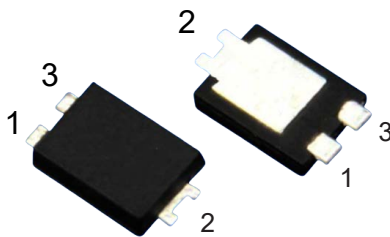

Features

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)


Parameter		Symbol	Limit		Unit
Maximum repetitive peak reverse voltage		VRRM	150		V
Maximum average forward rectified current		IF(AV)	5		A
Peak forward surge current 8.3 ms single half sine- wave superimposed on rated load per diode		IFSM	120		A
Operating junction and storage temperature range		TJ, TSTG	-40 to +150		°C
Typical thermal resistance per diode(Mounted on FR-4 PCB)		RθJC	72		°C/W
Instantaneous forward voltage per diode	IF=1A	TJ=25°C	VF(1)	TYP.	MAX.
	IF=1A	TJ=125°C		0.51	0.56
	IF=5A	TJ=25°C		0.46	-
	IF=5A	TJ=25°C		0.89	0.95
	IF=5A	TJ=125°C		0.82	-
Instantaneous reverse current per diode at rated reverse voltage		TJ=25°C	IR(2)	5	50
		TJ=125°C		5	-
					uA
					mA

Notes:


(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms


RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

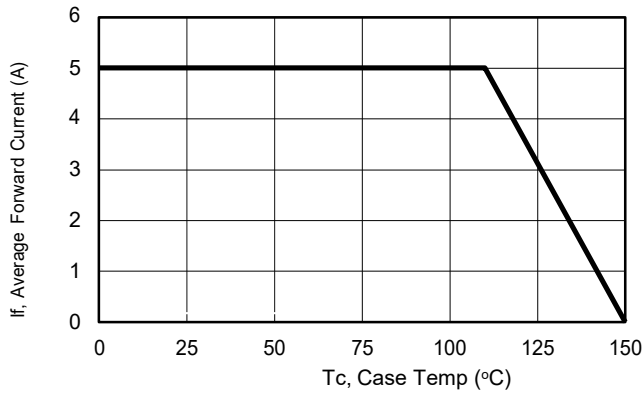


Current Derating, Case

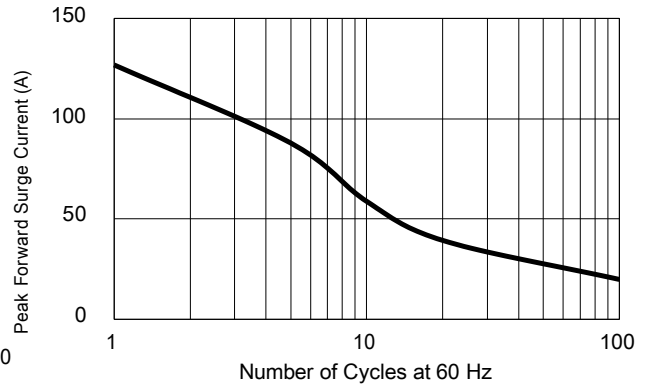


Maximum Repetitive Surge Current

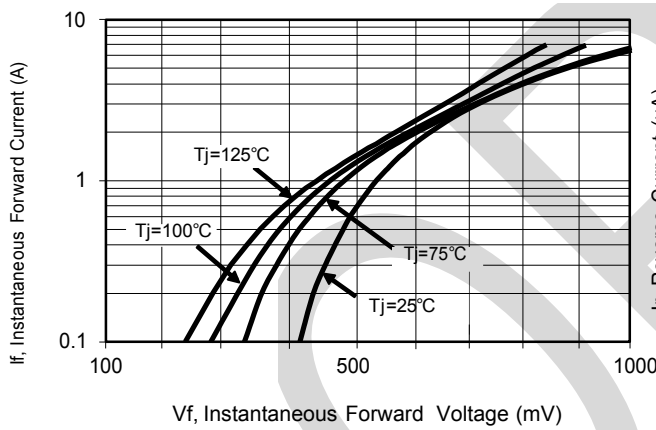

Typical Forward Voltage

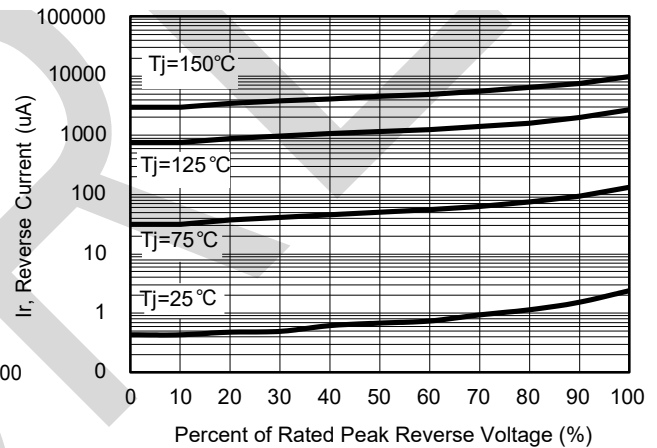


Typical Reverse Current

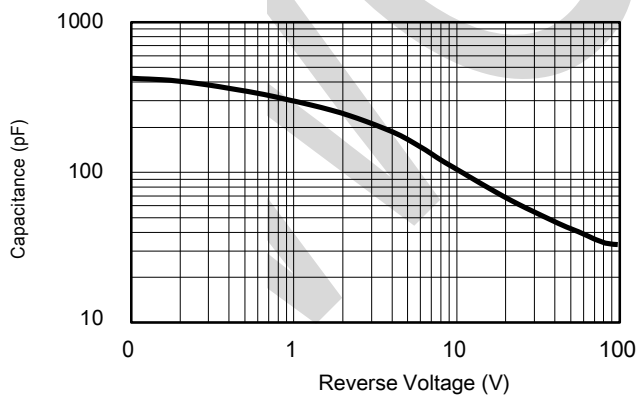

Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS


TO-277

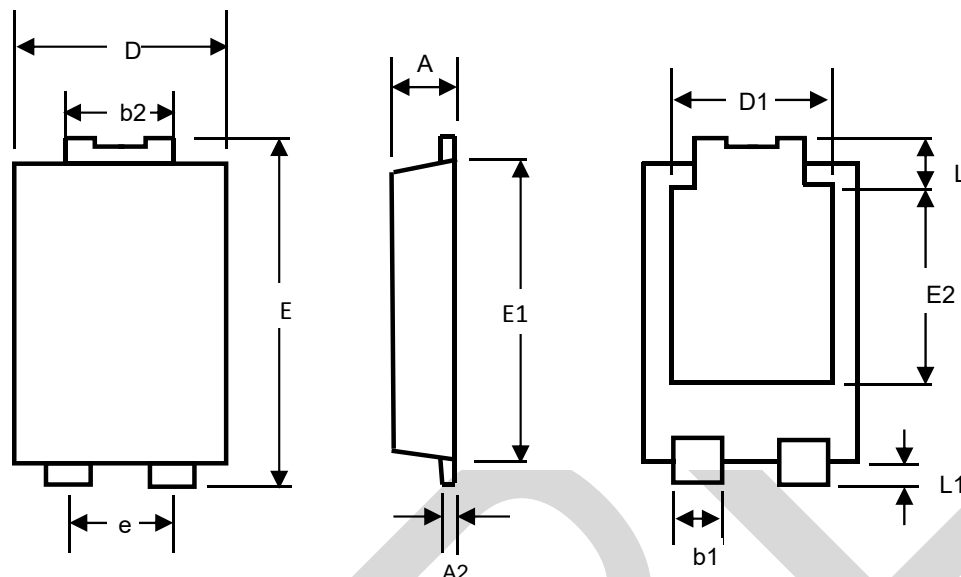

TO-277 mechanical data


UNIT		A	A2	b1	b2	D	D1	e	E	E1	E2	L	L1
mm	max	1.3	0.4	1.0	1.9	4.3	3.05	2.0	6.6	5.75	3.55	1.0	0.7
	min	1.1	0.2	0.8	1.7	3.9		1.8	6.4	5.3		0.8	0.5
mil	max	51.18	15.75	39.37	74.80	169.3	120.0	78.74	259.8	226.3	139.7	39.37	27.55
	min	43.30	7.87	31.49	66.93	153.5		70.86	252.0	208.6		31.49	19.69

TO-277 Suggested Pad Layout

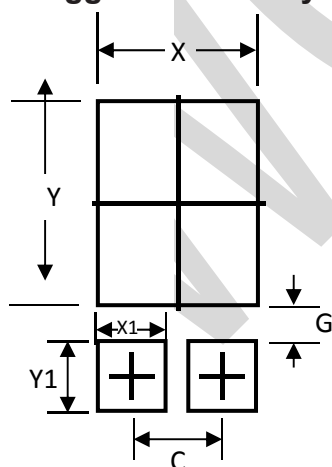

UNIT		C	G	X	X1	Y	Y1
mm	min	1.80	0.90	3.4	1.4	4.9	1.4
mil	min	78.86	35.43	133.86	35.43	192.91	55.12

Marking Information



①Product model :TSP5S150SP Referred to as 5S150

②PDC information:

Y X WW



WW:Week code(01 to 53)

X:Internal identification code


Y:Year code(ex:0=2020)

Packaging Information


1.Reel Dimensions



2. Inside Box



3. Outside Box

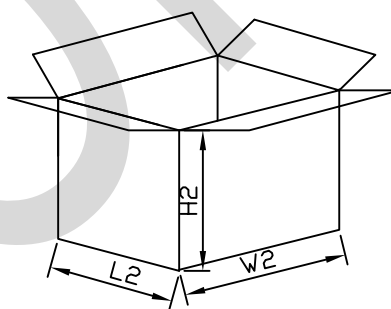

Packaging Information

NO	UNIT	Reel Dimensions			Inside Box			Outside Box		
Size	mm	φ	A	B	L1	W1	H1	L2	W2	H2
		330	70	15	335	335	43	360	360	360
QTY	PCS	Smallest package,5000PCS/reel			10,000PCS,2 reel in total			80,000PCS/carton,8 boxes in total		
Note	Tolerance ≤20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm									