



Superfast Recovery Rectifier

TO-247

MUR8060PTR



Features

- Low forward voltage drop
- Low leakage current
- High current capability
- Super fast switching speed
- High forward surge capability
- High reliability.

Mechanical Data

- Epoxy: UL 94V-O rate flame retardant
- Lead: lead solderable per MIL-STD-202, method 208 guaranteed
- Mounting position: Any

Parameter	Symbols	MUR8060PTR	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	600	V
Maximum RMS voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	V
Maximum Average Forward Rectified Current	I(AV)	80	A
Reverse Recovery Time. IF=0.5A, IR=1A, IRR=0.25A	Trr	50	ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	400	A
Max Forward Voltage at 40A and 25 °C	VF	1.85	V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=125 °C	IR	5 500	μA
Typical Junction Capacitance (Note1)	Cj	50	pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150	°C
Typical thermal resistance (Note 2)	RthJC	1.5	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Thermal resistance from junction to case

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

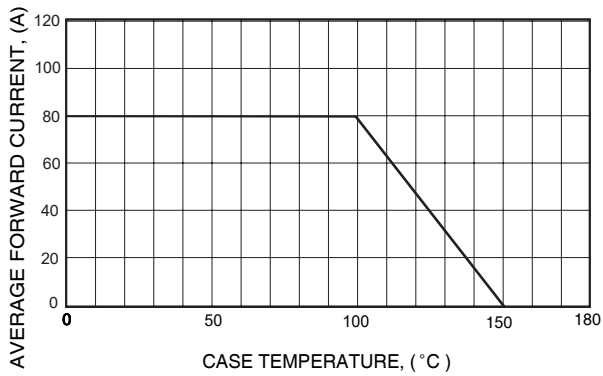


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

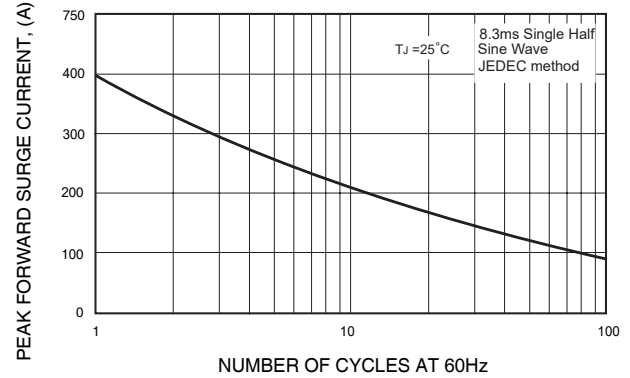


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS


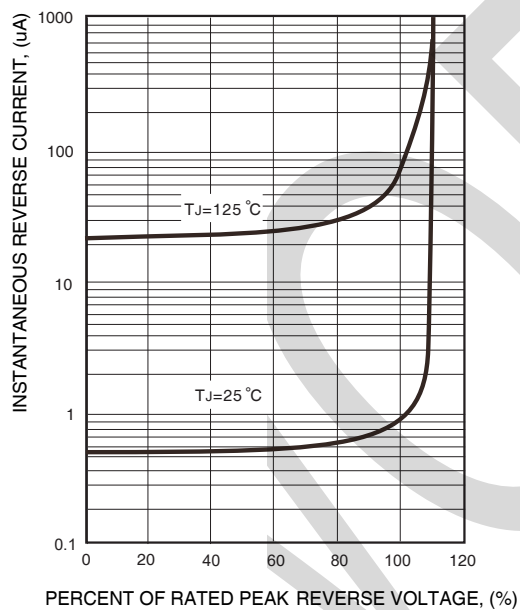



FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

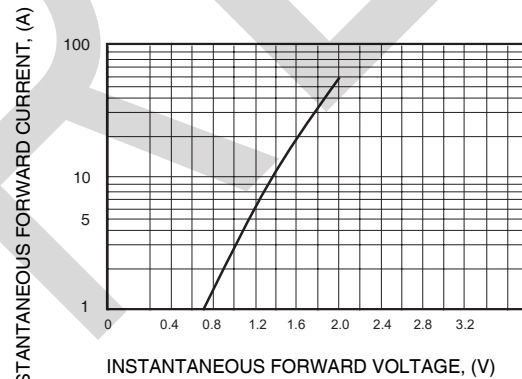

PACKAGE OUTLINE DIMENSIONS


Note: unit: mm

TO-247

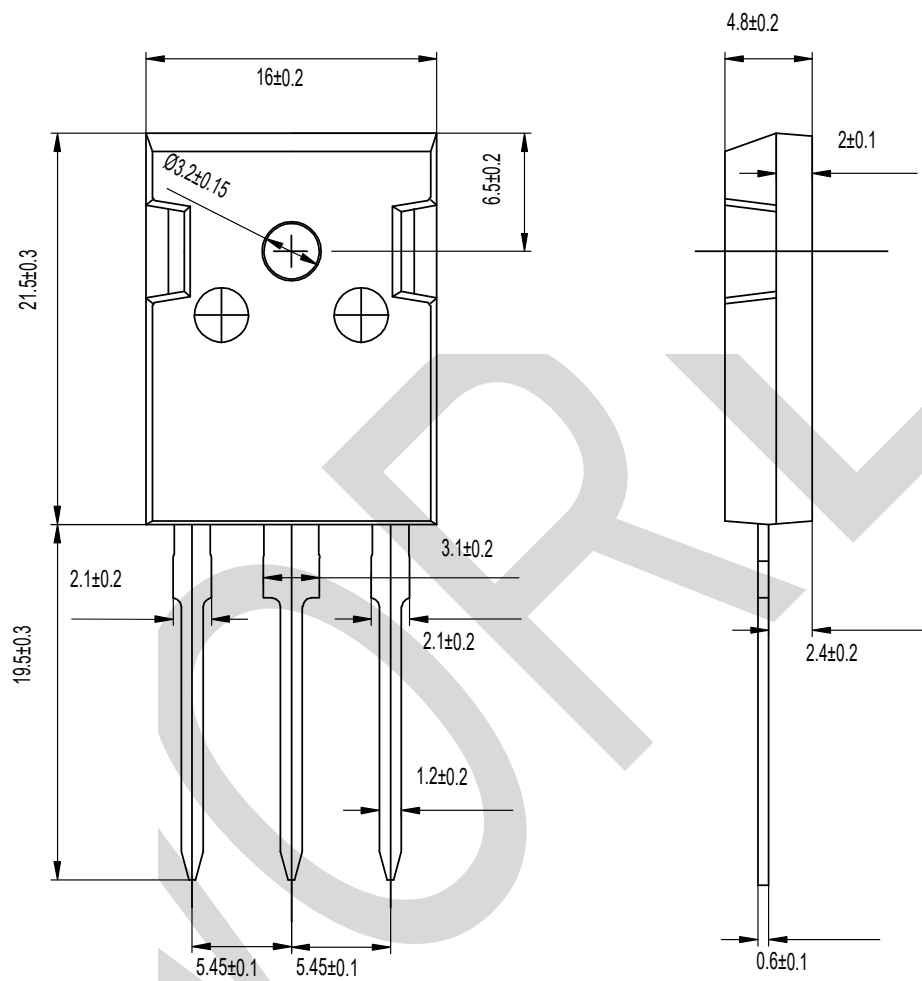


Dimensions in millimeters

Marking Information

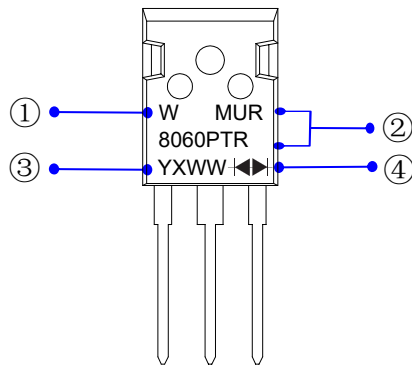


- ①W : Company's trademark
- ②Product model : MUR8060PTR
- ③PDC information:

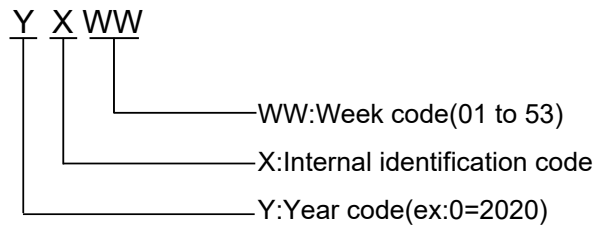

- ④ Double wafer


Packaging Information

1. Tube Dimensions

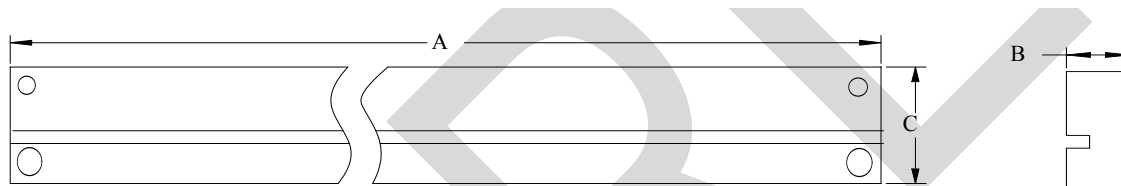

2. Inside Box

3. Outside Box

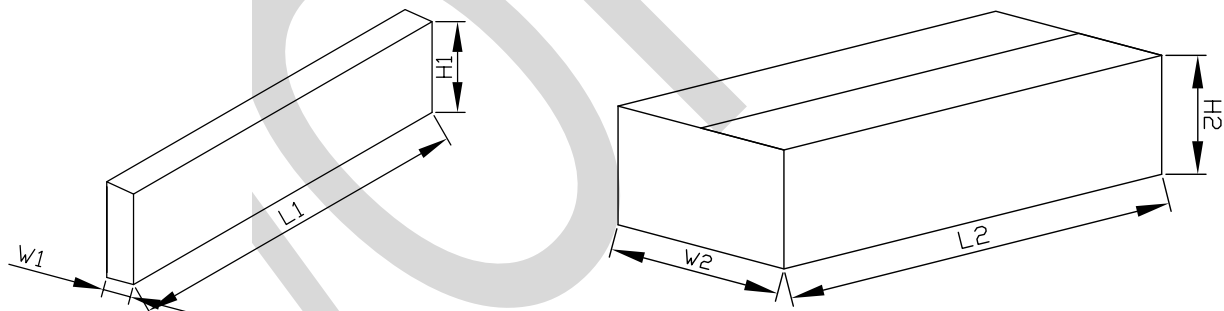

Packaging Information

NO	UNIT	Tube Dimensions			Inside Box			Outside Box		
Size	mm	A	B	C	L1	W1	H1	L2	W2	H2
		505	7	43	535	55	162	550	245	180
QTY	PCS	30PCS/Tube			Smallest package,600PCS, 20 tube in total			2,400PCS/carton,4 boxes in total		
Note	Tolerance ≤20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm									